



SNBM

Sinotech

Building Material Co., Ltd.



www.snmbd.com

SNBM

Premium Concrete Bricks

ISO 9001:2015 Certified

Master craftsmanship, creating timeless excellence



Call us for order

01704-828419





Table of Content

About SNBM	03
Our Mission, Vision & Values	04
Concrete Bricks	05
Hollow Wall Blocks	06
Pavers	07-08
Kerbstone & Edging Block	09-11
CC Blocks, Grass Paver & Erosion Control Block	12
Our Management	13
Photo Gallary	14
Our Esteemed Clients	15



About **SNBM**

SINOTECH BUILDING MATERIAL CO., LTD.


is a leading manufacturer of premium concrete bricks and interlocking paving solutions in Bangladesh. With a strong commitment to quality, innovation, and precision manufacturing, we provide durable and high-performance construction materials for residential, commercial, industrial, and infrastructure projects.

Our advanced manufacturing facility, modern production technology, and strict quality control systems ensure that every product meets the highest standards of strength, durability, and reliability.


At **SNBM**, we believe that quality building materials are the foundation of sustainable development and modern infrastructure. Through continuous improvement and customer-focused service, we are dedicated to becoming one of the most trusted building material brands in South Asia.

From highways and industrial zones to residential communities and urban landscapes, our products continue to support the growth of modern construction across Bangladesh.

Master craftsmanship, creating timeless excellence.

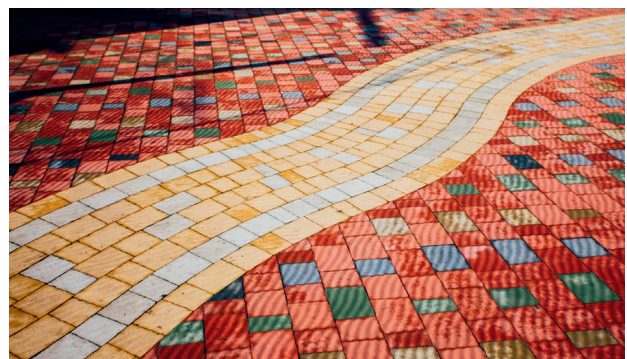

OUR MISSION, VISION & VALUES

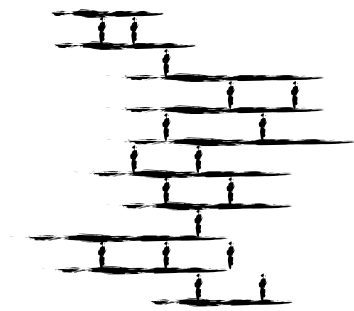

MISSION

To manufacture premium-quality concrete building materials that exceed industry standards in strength, durability, and design. We are committed to supporting modern infrastructure development through reliable products, advanced technology, and customer-focused service.



VISION

To become the most trusted and innovative concrete building material manufacturer in South Asia by continuously improving quality, embracing modern manufacturing technology, and delivering sustainable construction solutions for future generations.

CORE VALUES



Quality:

Rigid testing at every stage, from raw material to finished product.



Integrity:

Maintaining honest business relationships and delivering on commitments.



SNBM



Innovation:

Continual investment in R&G and automated production technology.



Sustainability:

Offering eco-friendly, non-burning concrete solutions that reduce carbon footprints.



Customer Focus:


Tailoring products and services to unique client project requirements.

Concrete Bricks

Application: Partition Wall, Boundary Wall, Garden, Road, Walk Way

Blocks (With Logo)

Size in mm	240×110×70
Size in inch	9.45×4.33×2.76
Color	Grey/Red/Black
Average Weight	3.5 - 3.8 KG
Strength in PSI	2000-2200
Hallmark	SNBM

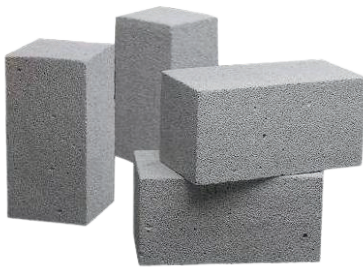


Solid Concrete Blocks (Without Logo)

Size in mm	240×115×70
Size in inch	9.45×4.49×2.76
Color	Grey/Red/Black
Average Weight	3.5 - 3.8 KG
Strength in PSI	2000-2200
Hallmark	No

Three Hole Blocks

Size in mm	230×110×75
Size in inch	9.06×4.33×2.95
Color	Grey/Red/Black
Average Weight	3.2 - 3.5 KG
Strength in PSI	2000-2200
Hallmark	No

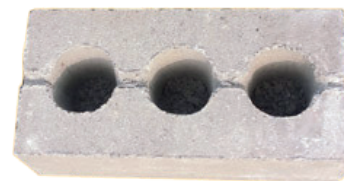

Hollow Wall Blocks

Application: Partition Wall, Boundary Wall, Garden, Air Ventilation, Retaining Walls, Pillars etc.



Hollow Wall Block (HWB - 100 mm)

Size in mm	390×190×100
Size in inch	15.35×7.48×3.94
Color	Grey/Red/Black
Average Weight	12 - 13 KG
Strength in PSI	1500-2200
Hallmark	No

Hollow Wall Block (HWB - 112 mm)

Size in mm	390×190×112
Size in inch	15.35×7.48×4.41
Color	Grey/Red/Black
Average Weight	10 - 14 KG
Strength in PSI	1500 - 2200
Hallmark	No



Hollow Wall Block (HWB - 150 mm)

Size in mm	400×200×150
Size in inch	15.75×7.87×5.91
Color	Grey/Red/Black
Average Weight	18.5 - 19 KG
Strength in PSI	1500 - 2200
Hallmark	No




Pavers

Application: Road Pavement, Walkway, Footpath, Parking Area, Stockyard

Uni Paver - UP 60 mm

Size in mm	222×110×60
Size in inch	8.74×4.33×2.36
Color	Grey/Red/Black
Average Weight	3.3 - 3.5 KG
Strength in PSI	2000-4000
Hallmark	No

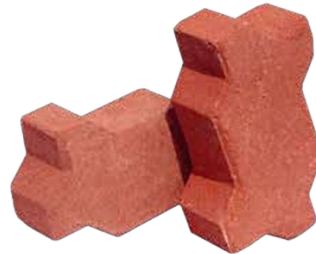


Uni Paver 80 mm

Size in mm	222×110×80
Size in inch	8.74×4.33×3.15
Color	Grey/Red/Black
Average Weight	4.2 - 4.5 KG
Strength in PSI	3000-7000
Hallmark	No

Rectengular Paver - RP 80 mm

Size in mm	200×100×80
Size in inch	7.9×4×3.15
Color	Grey/Red/Black
Average Weight	3.4 - 3.8 KG
Strength in PSI	3000-5000
Hallmark	No

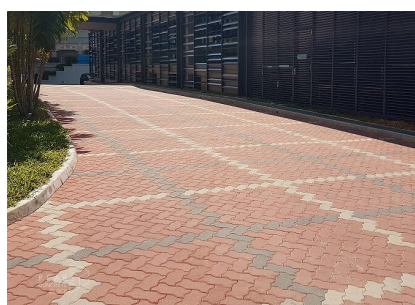

Pavers

Application: Road Pavement, Walkway, Footpath, Parking Area, Stockyard




H Pavers	
Size in mm	200×160×100
Size in inch	7.87×6.30×3.94
Color	Grey/Red/Black
Average Weight	6 - 7 KG
Strength in PSI	4000 - 7000
Hallmark	No

Hexagon Pavers	
Size in mm	250×216.51×60
Size in inch	9.84×8.52×2.36
Color	Grey/Red/Black
Average Weight	5.3 - 5.9 KG
Strength in PSI	2000 - 4000
Hallmark	No



Footpath Pavers	
Size in mm	600×200×60
Size in inch	23.62×7.87×2.36
Color	Grey/Red/Black
Average Weight	16.0 - 17.5 KG
Strength in PSI	2000 - 3000
Hallmark	No

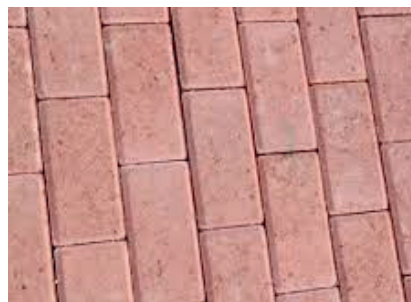


Kerbstone & Edging Block

Application: Median, Guide Wall, Road/Footpath edge uses.



Kerb Stone - K1	
Size in mm	550×380×150/120
Size in inch	21.65×14.96×4.72
Color	Grey
Average Weight	63.0 - 65.0 KG
Strength in PSI	1500 - 3000
Hallmark	No

Kerb Stone - K6	
Size in mm	500×400×120
Size in inch	19.69×15.75×4.72
Color	Grey
Average Weight	42 - 43 KG
Strength in PSI	1500 - 3000
Hallmark	No

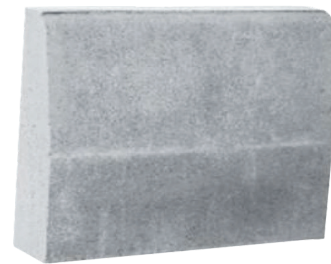

K9 Edging Block (LGED)	
Size in mm	600×200×60
Size in inch	23.62×7.87×2.36
Color	Grey/Red/Black
Average Weight	16.0 - 17.5 KG
Strength in PSI	2000 - 3000
Hallmark	No



Kerbstone & Edging Block

Application: Median, Guide Wall, Road/Footpath edge uses.




Saucer Slab

Size in mm	500×375×125
Size in inch	19.69×14.76×4.92
Color	Grey
Average Weight	40 - 41 KG
Strength in PSI	2000 - 3000
Hallmark	No

Edging Block - K4

Size in mm	375×225×100
Size in inch	14.76×8.86×3.94
Color	Grey
Average Weight	18 - 18.5 KG
Strength in PSI	1500 - 3000
Hallmark	No

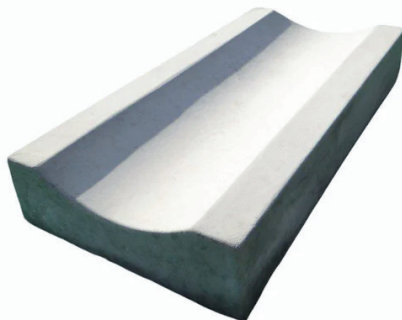

Saucer Drain

Size in mm	600×200×60
Size in inch	23.62×7.87×2.36
Color	Grey/Red/Black
Average Weight	16.0 - 17.5 KG
Strength in PSI	2000 - 3000
Hallmark	No



Kerbstone & Edging Block

Application: Median, Guide Wall, Road/Footpath edge uses.



L Shape Stone

Size in mm	500×400×250
Size in inch	19.69×15.75×9.84
Color	Grey
Average Weight	52.5 - 53 KG
Strength in PSI	1500 - 3000
Hallmark	No

Kerb Stone

Size in mm	475×300×150
Size in inch	18.70×11.81×5.91
Color	Grey
Average Weight	48 - 49 KG
Strength in PSI	3000 - 4000
Hallmark	No



Median Kerb Stone

Size in mm	530×200×200
Size in inch	20.87×7.87×7.87
Color	Grey
Average Weight	35 - 36 KG
Strength in PSI	3000
Hallmark	No




CC Blocks, Grass Paver & Erosion Control Block

Application: CC Block- Erosion Control, Soil/River/Canal Protection. Grass Paver- Interlik Patern, Greenary & Water Management




CC Block	
Size in mm	400×400×150
Size in inch	15.75×15.75×5.91
Color	Grey
Average Weight	51-52 KG
Strength in PSI	1500-2500
Hallmark	No

Double 8 Grass Paver	
Size in mm	398×398×80
Size in inch	15.67×15.67×3.15
Color	Grey
Average Weight	18 - 19 KG
Strength in PSI	3000 - 4000
Hallmark	No

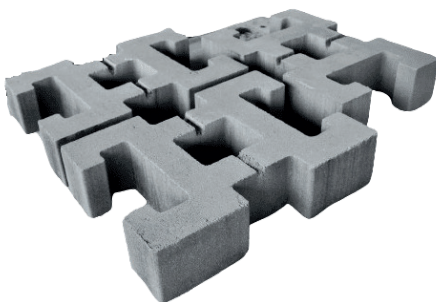

Erosion Control Block	
Size in mm	444×315×100
Size in inch	15.75×12.4×4
Color	Grey
Average Weight	19.5 - 19.8 KG
Strength in PSI	3000 - 4000
Hallmark	No

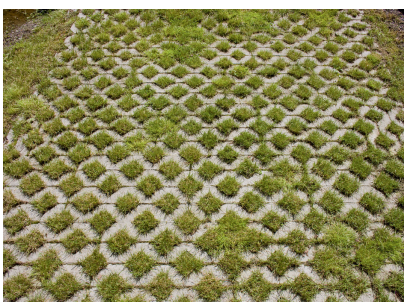



Our Management

Board of SNBM



Huang Shangwen
Chairman



Li Lihua
Managing Director

Chairman's Message

It is my great pleasure to welcome you to **Sinotech Building Material Co., Ltd.** Our journey has been built on a strong commitment to quality, integrity, innovation, and customer satisfaction. We believe that every successful project begins with reliable building materials and trusted partnerships. Through continuous improvement, advanced technology and the dedication of our talented team, we strive to exceed expectations and contribute to the sustainable development of the construction industry. I sincerely thank our valued customers, business partners and employees for their unwavering trust and support. Together, we will continue building a stronger foundation for a brighter, more prosperous future.



Photo Gallery

Production Line



Events



Our Esteemed Clients





Why Concrete Bricks?

- ✓ High Strength
- ✓ Long Lasting Durability
- ✓ Faster Construction
- ✓ Cost Effective
- ✓ Low Maintenance
- ✓ Eco-Friendly Solution
- ✓ Weather Resistant
- ✓ Precision Manufacturing
- ✓ Modern Construction Material
- ✓ Suitable for All Projects

WHY SNBM?

- ✓ Premium Quality Products
- ✓ Advanced Manufacturing Technology
- ✓ High Strength & Durability
- ✓ Precision Engineering
- ✓ Strict Quality Control
- ✓ Eco-Friendly Production
- ✓ Reliable Supply Capacity
- ✓ Professional Technical Team
- ✓ Fast Delivery Support
- ✓ Trusted Construction Partner



SNBM
Sinotech
Building Material Co., Ltd.

Contact Us:

Factory Address: Bara Rangamatia, Durgapur, Ashulia, Savar, Dhaka-1341.

Phone: 01704-828419; **Email:** info@snbmbd.com; **Website:** www.snbmbd.com